


BASIC INFORMATION

| Brand | Bru | Number of colour ways | 35 |
|------------------------------|------------|-------------------------------------|------------|
| Tariff item number | 5407930000 | MID | INDDEHOM16 |
| Country of origin | India | Characteristics | Texture |
| Vertical repeat cm | 0.50 | Vertical repeat inch | 0.20 |
| Horizontal repeat cm | 2.70 | Horizontal repeat inch | 1.06 |
| Face in | Yes | Full roll diameter cm | 24 |
| Full roll diameter inch | 9.4 | Average piece length m | 50 |
| Minimum for special colour m | 1000 | Delivery time weeks special lab dip | 4 |

CARE AND USAGE

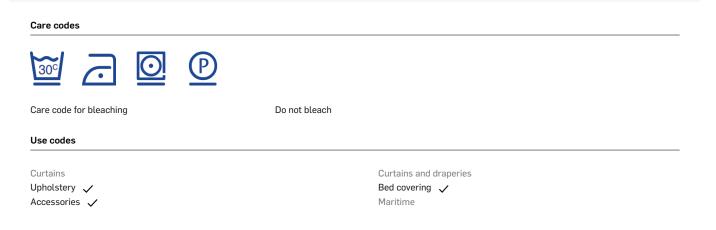

FABRIC SPECIFICATIONS

| Composition Construction Useable width cm Full width cm Weight g/m ² Colouring type Textured or non textured | 91% Polyester, 9% Viscose 33.07x23.63 1.42 144 364 Yarn dyed 66% not textured + 34% textured | Average yarn number Woven Useable width inch Full width inch Thickness mm Filament or staple | 15.58 Yes 55.91 56.7 0.000 84% filament + 16% staple |
|---|--|--|---|
| Treatment | | | |
| Bio treatment Soil and stain repellent Backing Mildew resistant Stain-free technology Other treatment | | Flame retardant Brushed/emerised Anti-bacterial/microbial Odour resistant PFC free No treatment 🖌 | |
| Type of finish | | | |
| Calender Thermofixed Airo | | Sanforized Washed Stenter ✓ | |
| Type of print or dye | | | |
| Disperse Vat | | Reactive 🗸 Pigment | |
| Weaving type | | | |
| Plain Satin Jacquard Other | | Twill Dobby ✓ Pile | |

FABRIC TYPE

There are no technical details for this section.

ENVIRONMENTAL STANDARDS



OEKO-TEX® CONFIDENCE IN TEXTILES STANDARD 100 O611045 Centexbel Tested for harmful substances. www.eeko-tex.com/standard100

FR STANDARDS

BS5852 source 0 NFPA 260 Yes Yes CAL 117 Complies

Yes

MECHANICAL PERFORMANCE

| Martindale rubs Wyzenbeek double rubs | 30,000 65,000 | Colour fastness to light Pilling Wyzenbeek wire screen double rubs - residential use, stopped | 6 4-5 |
|---|------------------|---|----------|
| Brush pilling | 4 | after 15 000 double rubs | 15,000 |
| Wyzenbeek cotton duck type heavy upholstery | Yes | Wyzenbeek wire screen heavy duty | Yes |
| Colour fastness to light - ISO 105-B02 | | | |
| Colour fastness to light | 6 | | |
| Colour fastness to water - ISO 105-E01 | | | |
| Colour fastness to water | 5 | | |
| Colour fastness to dry rub - ISO 105-X12 | | | |
| Colour fastness dry rub | 4-5 | | |
| Colour fastness to wet rub - ISO 105-X12 | | | |
| Colour fastness wet rub | 4 | | |
| Colour fastness to wear - ISO 12947-2 | | | |
| Colour fastness to wear | 4-5 | | |
| Tearing strength - ISO 13937-3 | | | |
| Tearing strength warp N | 250 | Tearing strength weft N | 170 |
| Tensile strength - ISO 13934-1 | | | |
| Tensile strength warp N/5cm | 1800 | Tensile strength weft N/5cm | 1700 |
| Elongation - ISO 13934-1 | | | |
| Elongation warp % | 43.5 | Elongation weft % | 32.5 |
| Seam slippage - ISO 13936-2 | | | |
| Seam slippage warp mm | 4 | Seam slippage weft mm | 5 |
| Dimensional stability (indicated in %) - ISO 3759 | | | |
| Dimensional change warp | 0.12 | Dimensional change warp after ironing with steam | -0.20 |
| Dimensional change warp after ironing without steam | 0.00 | Dimensional change weft | -0.15 |
| Dimensional change weft after ironing with steam | 0.27 | Dimensional change weft after ironing without steam | 0.07 |

WASHABILITY

Resistance to domestic washing 30° C, indicated in % - ISO 6330

| Dimensional change warp Dimensional change weft Colour fastness ISO 105 C06 | -0.40 -0.30 5 | Dimensional change warp after ironing Dimensional change weft after ironing | -0.20 -0.33 |
|---|---------------------|--|----------------|
| Resistance to domestic washing 60°C, indicat | ed in % - ISO 6330 | | |
| Dimensional change warp | -1.20 | Dimensional change warp after ironing | -1.07 |
| Dimensional change weft | -0.57 | Dimensional change weft after ironing | -0.27 |
| Colour fastness ISO 105 C06 | 5 | | |
| Resistance to dry cleaning P, indicated in $\%$ - | ISO 105 D01 | | |
| Dimensional change warp | -0.70 | Dimensional change warp after ironing | 0.00 |
| Dimensional change weft | -0.20 | Dimensional change weft after ironing | 0.00 |
| Colour fastness ISO 105 D01 | 5 | | |

CONSTRUCTION

| Yarn 1 | | | |
|---------------------------|----------------------------|---------------------|-------|
| Weft Composition | 100% Polyester | Weft Is Filament | Ye |
| Weft Is Not High Tenacity | Yes | Weft Is Textured | Yes |
| Weft Sizes | 300D | Weft Textured | Yes |
| Weft Threads per cm | 15.75 | Weft TPM | NA |
| Yarn 2 | | | |
| Weft Composition | 100% Polyester | Weft Is Filament | Yes |
| Weft Is Not High Tenacity | Yes | Weft Sizes | 1000D |
| Weft Threads per cm | 3.94 | Weft TPM | NA |
| Yarn 3 | | | |
| Weft Composition | 61% Polyester, 39% Viscose | Weft Is Filament | Yes |
| Weft Is Not High Tenacity | Yes | Weft Is Staple | Yes |
| Weft Sizes | 6NM | Weft Threads per cm | 3.94 |
| Weft TPM | NA | | |
| Yarn 4 | | | |
| Warp Composition | 100% Polyester | Warp Is Filament | Yes |
| Warp Is Not High Tenacity | Yes | Warp Is Textured | Yes |
| Warp Sizes | 150D | Warp Textured | Yes |
| Warp Threads per cm | 24.8 | Warp TPM | NA |
| Yarn 5 | | | |
| Warp Composition | 100% Polyester | Warp Is Filament | Yes |
| Warp Is Not High Tenacity | Yes | Warp Sizes | 1000D |
| Warp Threads per cm | 8.27 | Warp TPM | NA |

DOWNLOADS / CERTIFICATES

There are no technical details for this section.



6 of 6

Damaceno & Antunes, Rua da Alegria, 387 4475-310 Milheirós Maia